


Радиальные подшипники с уплотнением

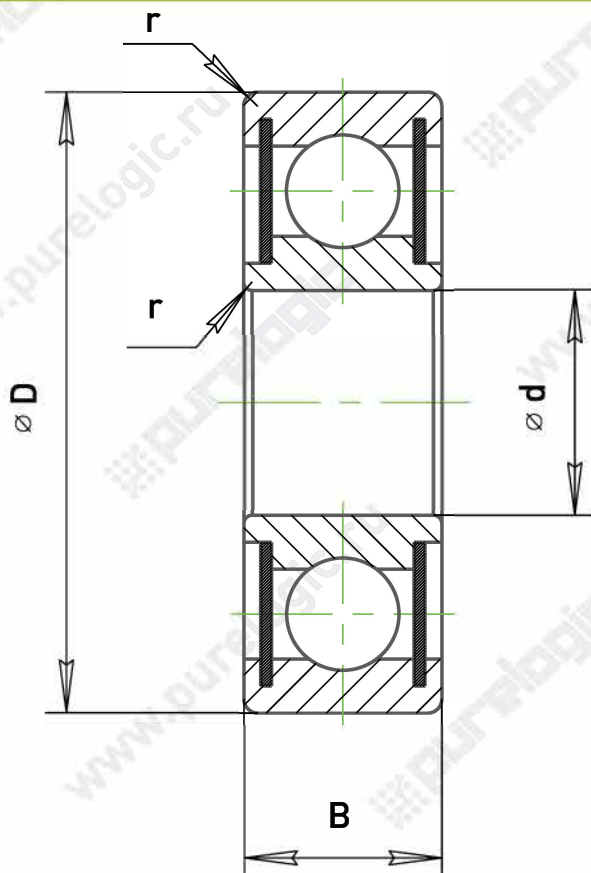

Наименование	d	D	B	r	Частота вращения		Грузоподъемн.	
					Смазка	Масло	Динам.	Стат.
605-2Z/P5	5	14	5	0.2	39000	46000	1.33	0.505
606-2Z/P5	6	17	6	0.3	35000	42000	2.19	0.865
607-2Z/P5	7	19	6	0.3	34000	40000	2.24	0.91
608-2Z/P5	8	22	7	0.3	32000	37000	3.35	1.4
609-2Z/P5	9	24	7	0.3	33000	40000	3.35	1.4
6000-2Z/P5	10	26	8	0.3	31000	36000	4.55	1.95
6001-2Z/P5	12	28	8	0.3	27000	32000	5.1	2.4
6002-2Z/P5	15	32	9	0.3	23000	27000	5.6	2.85
6003-2Z/P5	17	35	10	0.3	21000	25000	6	3.2
6004-2Z/P5	20	42	12	0.3	17000	21000	9.4	5.05
6005-2Z/P5	25	47	12	0.3	15000	18000	10.1	5.85
6006-2Z/P5	30	55	13	0.3	13000	15000	13.2	8.25